

THE ROLE OF ASON AND GMPLS FOR THE BANDWIDTH TRADING MARKET

Bandwidth Brokerage under the influence of novel control plane technologies

Andreas Iselt, Andreas Kirstädter, Rayane Chahine
*Siemens AG, Corporate Technology, Information & Communication
Munich, Germany*

Keywords: Bandwidth Brokerage, ASON, GMPLS, SDH, WDM

Abstract: Bandwidth services as they have evolved over the last years can increasingly be seen as a commodity. Multiple network operators have comparable offerings and compete for customers. This fuelled the foundation of bandwidth brokerage and bandwidth trading companies in the late 90s. Unfortunately, their business models were not very successful in the past. Besides the overall economic weakness at the moment we identify some generic and technical reasons for this. Moreover we show that with novel automation technologies like GMPLS or ASON/ASTN some of these problems can be alleviated. Possible operational models show how future bandwidth brokers or traders could be organized.

1 INTRODUCTION

Communication networks have evolved over the last decades into a highly structured system allowing splitting the overall structure into parts, e.g. functionally or geographically, that can be handled independently. This separation supported the foundation of organizations that focused on a subset of the whole network. For example, an Internet Service Provider (ISP) focuses on a single layer (the IP layer), whereas a city carrier concentrates on a single region. Obviously the structuring requires cooperation of these organizations and at the same time enables competition since the same service could be offered by multiple parties.

A major role in this scenario is played by the transport network layer having evolved over the last years into an integrated Optical Network. It typically consists of a traffic aggregation structure based on synchronous time division multiplexing (e.g. SONET/SDH/OTH) operated on a wavelength division multiplexing infrastructure (WDM).

1.1 History

Initially, the bandwidth business was bilateral between network operators and their customers. In the late 90's companies appeared that offered to trade or

broke bandwidth without operating their own network. Unfortunately, with the continuous bandwidth price decline and the weak economy the market did not accept this at that time.

1.2 Analysis & Future

In this paper we first analyze the reasons for the failure of the bandwidth broking and reselling model in the past: Long delivery times dictating long term bandwidth contracts in a volatile market showing a steady decline of bandwidth prices, nonexistent quality of service and interface standards, and missing usage of risk management tools. At a deeper look it becomes clear that the introduction of ASON/ASTN (resp. GMPLS) techniques will influence the economic basis of bandwidth reselling to a great extent: Automatic signaling will allow short term contracts (with also strongly reduced times to close the contracts) since the transaction cost become very small. The much shorter time frames reduce the financial risks the trading companies are exposed to. Standardized Service Level Agreements (SLA) and interfaces will allow bandwidth to be treated like a commodity (with high liquidity) complying with sets of unified quality standards in a more transparent market. Although almost all bandwidth traders stopped their activities at the moment,

brokerage firms are emerging. They work as intermediaries between buyers and sellers.

1.3 Overview

In the following sections of this paper we will give a short introduction to transport networks and the new control plane technologies GMPLS (generalized multi protocol label switching) and ASON (automatically switched optical networks). This is followed by an in-depth description of the business scenarios of bandwidth resellers and bandwidth traders. Finally we will analyze these business models and show how automation by a control plane may improve this business.

2 TRANSPORT NETWORKS

Transport networks are the basis for packet networks (e.g. Ethernet, IP) as well as for TDM infrastructures like the good old telephone networks. Therefore they have to offer high levels of reliability and predictability. This also contributes to the fact that the transport network operators often are a little bit reluctant to employ new technologies like ASON/ASTN.

2.1 Business Interaction

Transport network operators often have to buy or lease optical fibers from transport and utility companies as the basis of their network infrastructure. The fibers themselves often are quite abundant in today's infrastructures. Only their equipping with TDM (SDH/SONET) or WDM nodes at the endpoints and corresponding network management systems defines the value. The generated bandwidth is sold to carriers that themselves sell bandwidth in the form of SDH and or packet transfer to customers and retailers, as shown in Figure 1.

2.2 Market

The transport network bandwidth market is influenced by the following main tendencies: Network operators are merging. Either in the form of virtual companies (to extend their reach) or in the form of real merger and acquisition processes. Each market player tries to reduce its operational and capital expenditures by delaying network extensions and new investments, by using novel and bandwidth-saving resilience mechanisms, or by re-designing its business processes.

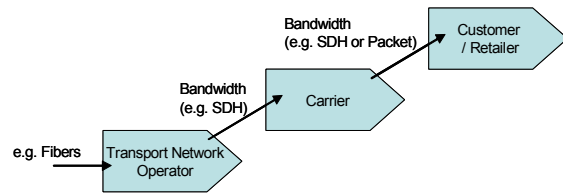


Figure 1: Value System of Network Operators.

3 GMPLS/ASON/ASTN

Optical transport networks are currently operated by centralized network management systems (NMS). These systems enable operators to carry out operation, administration and maintenance tasks, e.g. fault management, configuration management including maintenance of the network (e.g. software updates), as well as provisioning services from a central point. Though these network management systems are well approved, they have some significant limitations. Service provisioning, e.g. for leased lines or virtual private networks (VPNs) may take several weeks since the provisioning processes require a considerable amount of manual configuration and human communication.

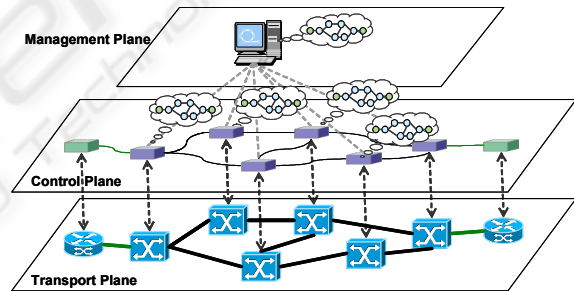


Figure 2: Architecture of control plane-based networks

To overcome the problems of central network management systems the introduction of a control plane has been proposed. This is currently followed by several standardization activities in the ITU-T, OIF (Optical Internetworking Forum) and the IETF (Internet Engineering Task Force).

Figure 2 shows the principle architecture of a control plane based network. The switching functionality in the transport plane is controlled by the control plane instances that are part of every network element. The network management system allows carrying out management functionalities based on interactions with the control plane. The bubbles indicate that the control plane instances in the network elements have an overview of the network domain they reside in. The connection setup is initiated via standardized network work interfaces: the user-network interface (UNI) on the customer side and the network-net-

work-interface on the interconnection points to neighboring network operators.

4 BANDWIDTH RESELLER

4.1 Business Idea

Generally spoken, a bandwidth reseller is a company having contracts with different network operators. It buys bandwidth from network operators and resells it to clients (retailing); it could also act only as a broker and just manage bandwidth contracts between buyers and sellers. Customers and carriers contact the bandwidth reseller that will allocate them the best connection specific to their needs instead of contacting many individual network operators to set up the single connection elements. The bandwidth reseller does not necessarily have its own network infrastructure; it cooperates with many interconnected local regional and global network operators and carriers (Figure 3).

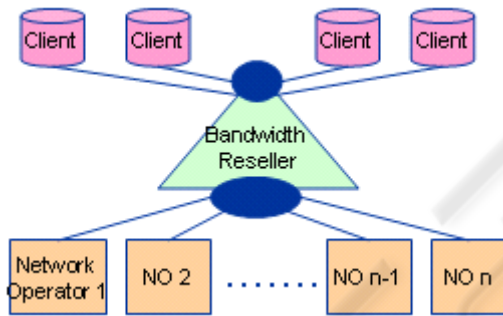


Figure 3: Bandwidth reseller concept.

In traditional networks, global network operators have to interact with regional ones to reach the end customers. Setting up the connection takes a large amount of time (up to 6 weeks). These results not only from the fact that the interfaces are not standardized - relying on human work to make connection. Also, the internal routing has to be set up - internal interfaces being also a problem. Setting up a connection between different domains, faces compatibility problems and requires several agreements and contracts between the players operating different domains. This proves to be time consuming, labor requiring, and expensive.

Therefore, a more efficient way is needed to make this process faster and automated. Through the introduction of standardized interfaces, new control plane technologies like GMPLS/ASON/ASTN aim to make this possible. However two types of standardization are required:

Physical standards, making the technologies of different domains and operators compatible.

Service level agreement (SLA), a service contract between a customer and a service provider specifying the service the customer should receive and it makes sure that, in case of non compliance, the service provider pays damages fees.

Then operators using Bandwidth Reseller connectivity based on GMPLS/ASON/ASTN technologies would deliver fast and flexibly with reduced cost over wide geographical and different regions.

Since the bandwidth reseller uses the connection provisioning services of several network operators, it can flexibly select the best offer to suit a specific connection request. The customers can change easily from one network provider to another looking for better service quality or lower costs connections. Using the UNI signaling, the connections can be torn down and new connections can be set up without the need for negotiations and long provisioning time.

This means that service holding times (time where a client has a connection through a certain provider) will progressively become shorter, from years and months down to days and even hours. Also, time to service (time for connection set up) will also be getting shorter (few seconds) in order to maintain service profitability.

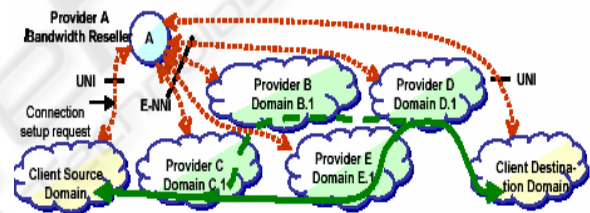


Figure 4: Network model for bandwidth reseller.

Figure 4 describes a scenario where a source client would like to get connected to a destination client. The client contacts the bandwidth reseller by its UNI and requests a connection setup via the bandwidth reseller. There are two path alternatives for the connection between the client source domain and the client destination domain. One path is through provider C, provider E and provider D whereas the second path goes through provider C, provider B, and provider D. If one of the network operators B or E can offer a better interconnection in terms of cost and quality of service QoS, then the path containing that network operator is chosen.

The customer has only a business relation to the provider A. The signaling information between the bandwidth reseller and its customer may be sent out-of band over an external IP or Ethernet network. The network connectivity must be known to be able to route the connections request to the client destination domain.

Comparable models are already established in the energy business, where a company acts as a general contractor. The core competencies of such a general contractor are the customer relations management and connectivity service retail. Given the successful trading of gas, electricity and power in the energy industry, it is time for the telecommunication industry to enter this world; and definitely the Bandwidth Reseller will be one of the most attractive business opportunities.

4.2 Basic Interactions

Interaction between Bandwidth Reseller and Network Operators

The bandwidth reseller buys bandwidth in large scale from network operators. It has framework contracts with those network operators; meaning that it guarantees them that it will buy a certain amount of bandwidth every time period. These framework contracts allow getting the bandwidth for low prices because of volume discount rates the single operators are willing to offer for monthly assured sales of bandwidth.

In another functional model the bandwidth reseller could only be a broker, acting as an intermediary between buyers and sellers. Network operators just contact it offering bandwidth for sale. The role of the broker then would be to find clients for these offers. It is a sort of bandwidth matchmaker that negotiates bandwidth contracts. Counterparties then contract with each other. When the deal is done, the broker earns a commission directly from counterparties.

Interaction between Bandwidth Reseller and End Customers

Prior to connection setup, a contract agreement must be set in place. The end customer and the bandwidth reseller establish a framework contract. Via this contract they specify the allowable range of requests and the bandwidth constraints the client is authorized to ask for in his connections.

Once this paper work is done, the client is granted permission to access the network. It signals its requests towards the control plane of the transport network. The signaling is done through the UNI interface running between the client and the control plane and allows the user to request connections. The UNI allows the client to perform a number of functions such as Connection Create, Connection Delete, Connection Modify and Status Enquiry.

After verifying its right to utilize the network and the correct type of connection, access to the transport network is granted and a connection is es-

established with the parameters necessary for the client's application. In this process the client only has a business relation with the Bandwidth Reseller, and does not know which network operator is actually supplying the bandwidth for his connection.

From the above description of the interaction between the different players, we notice three possible access points: The access point to the bandwidth reseller (for legal contract agreement between client and bandwidth reseller), the access point to the control plane (for signaling), and the access point to the transport plane (for sending and receiving data).

4.3 Ownership Models

Given the three access points, a bandwidth reseller company may show three different ownership models:

Model 1

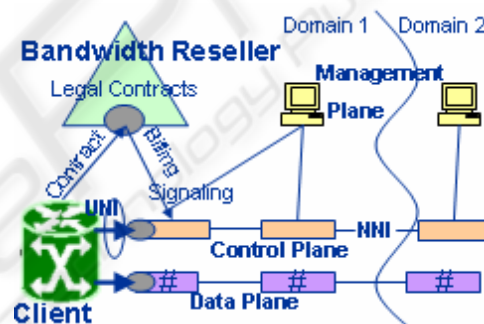


Figure 5: Ownership model 1.

The bandwidth reseller handles only legal agreements with clients. It is only responsible for buying large amounts of bandwidth from network operators and selling them to customers. The company itself could be a small office, where only few people are needed because the main task would revolve around legal work and contract making. In this case the Bandwidth Reseller is not concerned with the control plane operation or any access switch that connect clients to the network.

The client would directly signal to a control plane operated by the first network operator. In this case the bandwidth reseller would have compensated the network operator for running the signaling access point.

Model 2

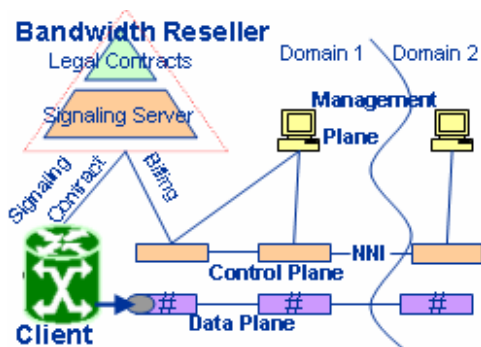


Figure 6: Ownership model 2.

The bandwidth reseller is not only responsible for legal agreements but also for operation of the access part of the control plane running its own signaling server.

On the one hand this requires extra work to be done on the other hand the compensation to the network operator is reduced. The client would directly signal its transmission request to the bandwidth reseller.

Model 3

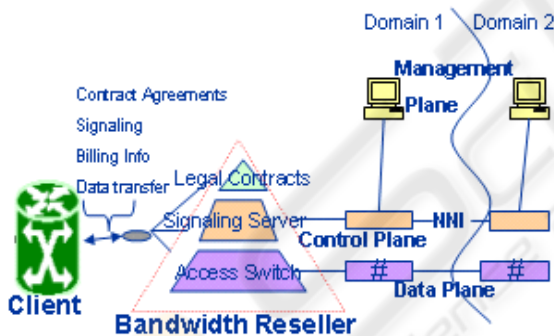


Figure 7: Ownership Model 3

The Bandwidth Reseller is responsible for legal contract agreements with clients, operation of the control plane server and its own access switches connecting the clients to the transport network. Having its own access switches, the bandwidth reseller would establish connections of remote regions to the network.

More work forces are needed in this case: People to run the contract agreements, people to operate the signaling server, and people for the installation, and maintenance of the switches.

5 BANDWIDTH TRADING MARKET EVOLUTION

The following chapters describe and analyze the first wave of bandwidth broking taking part from the mid 90's until the beginning of this century.

5.1 Bandwidth Trading Market Rise

In mid 90's new group of companies that combined telecom expertise with experience of utility market started offering brokerage and trading services.

In 1997 Band-X pioneered the idea of trading bandwidth, followed in 1998 by RateXchange who offered to link buyers and sellers anonymously. Later in May of that year, Enron announced to the world that it was creating a new market for trading bandwidth. By the end of 1999 other energy brokers began to create their own bandwidth market desk, such as Skura Dellcher, and formed The Association of International Telecommunications Dealers (AITD). In December of that year, Enron completed the world's first bandwidth trade. By the beginning of 2000, many carriers were greeting a new era of commodity bandwidth trading. Reluctant at the beginning, deep pocketed energy utility companies Williams, Dynegy, El Paso and Aquila decided to enter the trading market. In May 2000, the first comprehensive index to measure telecommunications bandwidth prices was launched. By September 2000, it was estimated that the BW trading market should will \$441 billion by 2005.

5.2 Bandwidth Trading Market Fall

Year 2001 was the beginning of the fall: In January, TeleExchange suspended its operation and in March 2001 a 25-30% decrease of BW prices since January 2001 was listed. In June 2001, Bandwidth.com ceased its trading activities and converted to a broker. Since October 2001, 17 companies, with a combined market capitalization of \$96 billion went bankrupt. December 2001 was the major turnover: Enron filed Chapter 11 bankruptcy. Seeing Enron falling, other energy merchants ceased trading BW in 2002 and returned to their core businesses: electricity and gas. By March 2002, brokers continued to match buyers and sellers but ceased any trading activity. In October 2002, 47 carriers went bankrupt, trying to compete on bandwidth prices. By December 2002, prices had fallen 44% from January 2001 and weren't likely to rise anytime soon.

Starting 2003, people are expecting for bandwidth prices to stabilize. Some even predict positive numbers in the next few years.

6 ANALYSIS

6.1 Reasons for Bandwidth Trading Failure

As a summary it can be said that the following effects contributed to the collapse of the BW trading market:

The decline in the Bandwidth prices induced a glut (i.e. supply exceeding demand) in the bandwidth and made it a product of very low liquidity. This all, made it hard to be considered and treated like tradable commodity.

In addition, the collapse of Enron Corp. in fall 2001, made all other utility companies take out themselves from the bandwidth trading market.

The bad economical situation made it worse and induced little credit worthy buyers and sellers, carriers expected a price saving of 15% to 20% before going to broker, other reluctant carriers also feared to loose by selling the excess capacity at bargain prices. Another important reason were the long term bandwidth contracts that service providers were stuck to and the very long time to close a contract - usually 60-90 days and more.

Also, technical incompatibilities between network operators were a major problem due to the non-existent unified set of quality of service standards.

Finally, telecommunication companies didn't use risk management tools analyzing their exposure to risks and determining how to best handle such exposure. This made them blind to the risks of such a volatile market with huge price movements.

6.2 Improvements Expected by ASON

Looking a little bit deeper into the matter it becomes clear that the introduction of ASON/ASTN (respectively GMPLS) techniques will change a lot the economic basis of bandwidth reselling:

Automatic signaling will allow short term contracts since the transaction cost become very small. Also, the time to close a contract will be reduced heavily. The much shorter time frames reduce the financial risks the trading companies are exposed to.

Standardized Service Level Agreements (SLA) will allow bandwidth to be treated like a commodity complying to sets of unified quality standards: It will be more interchangeable between different operators making it possible to buy bandwidth through future contracts. This will greatly increase the liquidity of bandwidth (i.e. the ability to be converted into cash quickly and without any price discount). The consequence is a more transparent market in which cur-

rent trade and quote information is readily available to the public and the price of bandwidth is subject to supply and demand. Finally, common standardized interfaces will also assure technical compatibilities between network operators.

7 SUMMARY

Although almost all bandwidth traders stopped their activities at the moment, brokerage firms are emerging. They work as intermediaries between buyers and sellers. Waiting for the market and bandwidth prices to stabilize, it is only a matter of a few years that capacity trading will catch up again and this time not only energy traders will be involved but all telecom companies will want to be part too, and the control plane technologies like GMPLS and ASON/ASTN will definitely be key players in the technology behind this huge market.

To analyze the Bandwidth Trading business idea, a market study and analysis is necessary. The Bandwidth market evolution during the past few years gives us an indication on how transaction of capacity would be like in the future.

This enables new services, giving the opportunity to consider new business ideas, such as service on demand, dynamic bandwidth provision, and a virtual bandwidth market place. In the future, the virtual market places will enable selling and leasing of bandwidth making room for bandwidth brokerage in the telecommunication industry.

REFERENCES

- Kirstädter A., Iselt A., Schupke D., Prinz R., Edmaier B., "Cost Structures of Transport Networks", ITG VDE NetWorkshop 2003, Gladbeck, Germany, Sept. 29, 2003.
- Glasner J.: Enron: A Bandwidth Bloodbath, November 2001.
- Josh Long: Brokers Regroup after Traders Call it Quits, Trading Desk, March 2002.
- Josh Long: Energy Merchants cease Bandwidth Trading, Trading Desk, February 2002