

Improving 2D Reactive Navigators with Kinect

Javier Gonzalez-Jimenez, J. R. Ruiz-Sarmiento and Cipriano Galindo
System Engineering and Automation Dpt., University of Malaga, Malaga, Spain

Keywords: Kinect, Reactive Navigation, Obstacle Detection, Mobile Robot.

Abstract: Most successful mobile robots rely on 2D radial laser scanners for perceiving the environment. The use of these sensors for reactive navigation has a serious limitation: the robot can only detect obstacles in the plane scanned by the sensor, with the consequent risk of collision with objects out of this plane. The recent commercialization of RGB-D cameras, like Kinect, opens new possibilities in this respect. In this paper we address the matter of adding the 3D information provided by these cameras to a reactive navigator designed to work with radial laser scanners. We experimentally analyze the suitability of Kinect to detect small objects and propose a simple but effective method to combine readings from both type of sensors as well as to overcome some of the drawbacks that Kinect presents. Experiments with a real robot and a particular reactive algorithm have been conducted, proving a significant upgrade in performance.

1 INTRODUCTION

Most successful mobile robots rely on 2D radial laser scanners for perceiving the environment and on a hybrid navigation approach (Fiorini and Shiller, 1988), including a reactive algorithm to deal with obstacle avoidance (Blanco et al., 2008). The usage of 2D scanners for reactive navigation bears a serious limitation: the robot can only detect obstacles on the plane scanned by the sensor, typically a plane parallel to the floor. Obviously, this entails a collision risk with objects at a different height or with salient parts. Such a limitation can only be tackled by gathering 3D information of the robot's surrounding from a three-dimensional field-of-view. Past solutions for obtaining 3D data includes the so-called actuated laser range finders (aLRF), which are expensive and not quick enough for mobile robot navigation purposes (Holz et al., 2008), (Marder-Eppstein et al., 2010). Nowadays, this hurdle can be overcome by RGB-D cameras, like Kinect (Kinect, www.xbox.com).

Kinect has been developed by Microsoft® as a natural interface for videogames. Additionally, it presents certain features that turn it into an attractive device for mobile robotics:

- It is a compact and lightweight sensor which provides both RGB and range images.
- It is fast, working at a frequency of 30 Hz.
- The operation range is acceptable for indoor applications: from 0.5 to 3.5m.

- It is cheap: around 150€ nowadays.

With the aim of improving the reactive navigation capabilities of a mobile robot, in this work we address the problem of replacing (or enhancing) a radial laser scanner which feeds a reactive navigator with a Kinect sensor. It is important to remark that our interest is not in the modification of the reactive algorithm, but in adapting the Kinect depth image in order to provide the navigation algorithm with a virtual 2D scan, encapsulating the 3D world information. For such a goal, two major drawbacks need to be overcome. On the one hand, the depth image of Kinect, which has a resolution of 640x480 pixels, needs to be effectively condensed in a 2D scan format, losing as less meaningful information as possible for the motion algorithm. On the other hand, Kinect has a large blind zone, both in angle (i.e. narrow field-of-view) and for short distances.

For a solution to these problems we propose a two-steps postprocessing of the Kinect data:

- i. The range image can be seen as the output of 480 radial scanners heading to different tilt angles. We simplify that information by projecting the perceived obstacles around the robot on a virtual horizontal scanning plane.
- ii. A short-term memory of sensed obstacles is implemented such that unobserved obstacles lying in the blind zone of the sensor are incorporated into the virtual scan.



Figure 1: Kinect sensor and coordinate system (taken from (Garcia and Zalevsky, 2008)).

Although there are some works that use Kinect as an input sensor for reactive navigation (see for example (Cunha et al., 2011), (Biswas and Veloso, 2011)), to the best knowledge of the authors the commented drawbacks have not been explicitly addressed.

In order to test the suitability of the proposed approach, a set of experiments has been conducted within cluttered scenarios. The experiments have validated the improvement in performance of a particular reactive navigator (Blanco et al., 2008), though the solution presented here can be applied to any other reactive algorithm that utilizes a 2D representation of the space, i.e. only relying on 2D laser scanners.

Next section gives a description of the Kinect device. Section III presents the proposed solution for the usage of Kinect as an additional input sensor for any reactive navigation algorithm based on a 2D obstacle representation. In section IV results from the conducted experiments are presented and discussed. Finally, some conclusions are outlined.

2 THE KINECT SENSOR

2.1 Description

The Kinect device (see figure 1) is equipped with an RGB camera, a depth sensor, a matrix of microphones, a motorized base which endows the sensor with a tilt movement of $\pm 27^\circ$, and a 3-axis accelerometer.

Focusing on the depth sensor, also called range camera, it is composed of an infrared light projector combined with a monochrome CMOS sensor. It has a VGA resolution (640x480 pixels) with 11-bit resolution depth, and a data refresh ratio of 30 Hz. Its nominal field of view is 58° in the horizontal plane and 45° in the vertical one. The operational range reported by the manufacturer is from 1.2 m. to

3.5, though in our experiments we have tested that the sensor is able to detect objects placed at 0.5 m. (see section 2.3).

2.2 Working Principle of the Range Camera

The range camera of Kinect consists of two devices: an infrared (IR) light projector which casts a pattern of points onto the scene and a standard CMOS monochrome sensor (IR camera) (Freedman et al., 2010). Both are aligned along the X axis, with parallel optical axis separated a distance (baseline) of 75mm (see figure 1). This configuration eases the computation of the range image, which is performed through the triangulation between the IR rays and their corresponding dot projections onto the image. The method to compute the correspondence between rays and pixels relies on innovative technique called Light Coding (Garcia and Zalevsky, 2008), patented by PrimeSense (PrimeSense, www.primesense.com), which entails a very particular factory calibration. In this calibration, a set of images of the point pattern, as projected on a planar surface at different known distances, are stored in the sensor. These are the so-called reference images.

Kinect works like a correlation-based stereo system with an ideal configuration (i.e. identical cameras, aligned axes separated along the X axis) where the IR rays are “virtually” replaced by line-of-sight of the points in the reference images. As in stereo, depth at each image point is derived from its disparity along the X axis, which is computed by correlating a small window over the reference image. Further information about this calculation can be found in (Khoshelham, 2011).

Regarding the accuracy of this method, the distance errors are lower than 2 cm. for close objects (up to 2m.), linearly increasing until an average error of 10 cm. at 4m.

2.3 Kinect Reliability for Detecting Thin Obstacles

To assess how much reliable Kinect is to feed a robot reactive navigation system, it is of interest to analyze its capacity to detect surrounding obstacles, particularly those that are hardly detectable by other sensors, either because of their small size or because of their position in the scene, e.g. the salient board of a table, the legs of a chairs, coat stands, etc.

We have performed a number of experiments where sticks of different thickness (1, 2, and 4 cm.) were horizontally placed in front of the sensor, at a

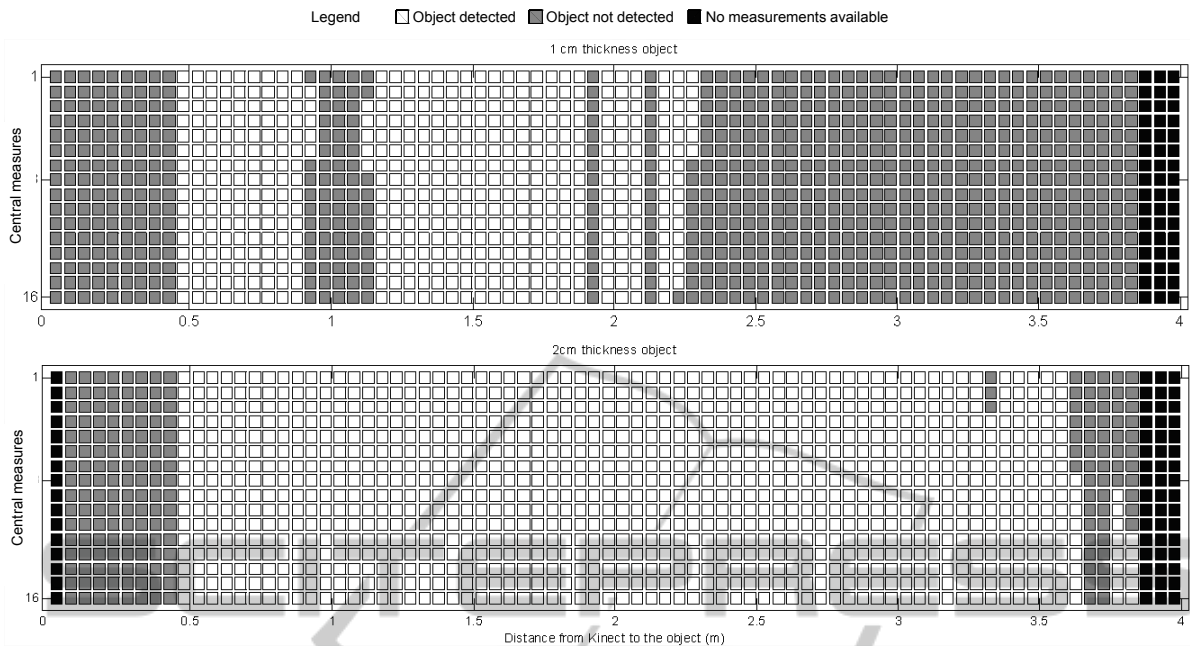


Figure 2: Results for the small obstacle detection experiment. The vertical axis represents the 16 central columns of the range image. The horizontal axis is the distance, discretized into intervals of 5 cm, from Kinect to the stick horizontally placed in front of the robot. Each cell encodes whether the stick was detected at any of the image rows considered.



Figure 3: Experiment setup to test the “visual acuity” of Kinect for detecting small obstacle. In this particular case, the obstacle is a horizontal stick with a thickness of 4 cm.

certain height, verifying whether they are detected at different distances. The experiments were conducted in a corridor with the Kinect sensor mounted on a mobile robot (see figure 3). To extract the meaningful data for this analysis we only focused on a rectangular window of the range image, concretely the 16 central columns of a small number of consecutive image rows at the height where the stick is expected to be. We must account for an interval of

rows since there is no guarantee that the stick is observed in a single, fixed row during all the robot run. Notice that, though the stick is roughly horizontal, its projection on the range image may cover different rows and also may change from one position to another.

Starting at a distance of 4 meters from the obstacle, the robot gradually moves towards it at discrete increments, while recording range images as well as the robot odometry at each position. This experiment was repeated 5 times for each thickness (1, 2, and 4 cm.).

Figure 2 displays the results of two of these robot runs, for the 1 and 2cm. stick. It is interesting to see how the 2cm.-thick stick was almost always observed over the full operational interval (from 0.5 to 3.5 m.). The plot for the 4cm.-wide stick has been omitted because it was always detected.

These results reveal the Kinect’s potential for detecting small obstacles up to an acceptable distance. Note how in the case of the obstacle of 1 cm its detection is not stable: though it starts to be detected at 2.3 m, it later disappears because of the discrete spatial sampling of the sensor.

3 KINECT AS INPUT SENSOR OF A 2D REACTIVE NAVIGATOR

In general, the use of Kinect to feed a reactive navigator based on a 2D space representation presents two difficulties: i) the huge amount of data it provides, and ii) the existence of a blind zone both at short distance and because of the narrow horizontal field-of-view (in comparison to laser radial scanners). Our solution to overcome these issues consists of a post-processing stage to conveniently adapt the data to the specific needs of the reactive navigator, which may also receive sensorial information from other sources, e.g. a 2D laser scanner (see figure 4).

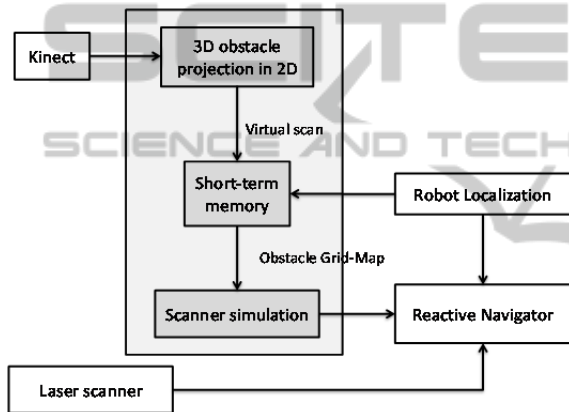


Figure 4: General diagram of the proposed system to combine data from a laser scanner and a Kinect sensor to feed a reactive navigator.

The first step of such a post-processing stage aims at reducing the huge amount of data while keeping the relevant 3D sensorial information about obstacles. A second phase strives for coping with the problem of the blind zone by creating a short-term memory

which temporally recalls the perceived obstacles around the robot. This memory is then transformed to a scan format suitable to be exploited by the reactive navigator. Next, these processes are described.

3.1 Projection of the Point Cloud to 2D

The Kinect sensor provides more than 300.000 measures per frame at 30Hz. This intense flow of data provides the robot with very valuable information about the surrounding but entails two problems for a reactive navigator: First, it becomes a significant computational burden that could hamper the robot to concurrently execute other tasks, e.g. robot localization, mapping, etc. Second, these data cannot be directly exploited by conventional robot reactive algorithms designed to be fed with 2D scans, such as *Virtual Force Field* (Borenstein and Koren, 1989), *Nearness diagram* (Minguez and Montano, 2004), *PTG-based navigator* (Blanco et al., 2008), etc.

Our approach to overcome these two problems consists in condensing the 3D Kinect data into a 2D scan by selecting the minimum measured distance from each column of the range image. This is a simple and efficient procedure whose results is a virtual scan of 640 ranges (the number of columns in the image) that captures the closest obstacle point for all the different heights (image rows), as shown Figure 5.

Please, notice that, by extracting a virtual scan for different height intervals, this solution could cope with robots with varying polygonal sections. The solution implemented in this work, thereby, is a particular case of this general approach.

3.2 Short Term Memory

A serious limitation of Kinect is its inability to

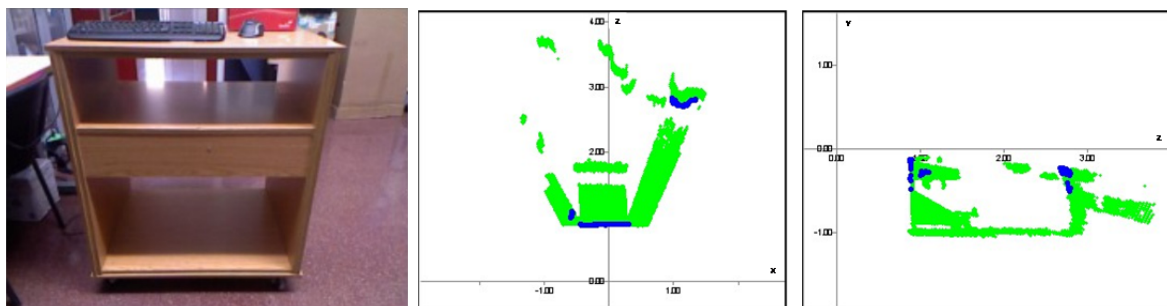


Figure 5: Left, image of the scene captured by the RGB camera. Middle, top view of the scene perceived by the range camera. Right, lateral view of the same scene. The green points correspond to discarded measurements, and the blue ones are those considered for the virtual scan.

detect close objects, both below its minimum operational range and out of the field-of-view (FOV). The minimum range depends on the surface color and material, and is typically between 0.5 and 1 m., while the horizontal and vertical FOV are 58 and 45 degrees, respectively. This *blind zone* becomes a serious drawback for a reactive navigator, since when the robot approaches an obstacle (both with rotational or translational movements) it suddenly disappears and the space becomes obstacle-free, causing the robot to crash into it. To overcome this problem we propose a short-term memory around the robot location which maintains previous measurements temporally. Such a memory has been implemented through a grid, similarly to an occupancy map (see figure 6), which is formalized as follows.

3.2.1 Memory

A short-term memory M is defined as an $n \times m$ matrix, which discretizes a certain bi-dimensional area around the robot. Let $M(i,j)$ represent the probability of the cell $c_{i,j}$ to be occupied by an obstacle, based on the observations, o_1, \dots, o_k , of the robot, that is:

$$M(i, j) = p(c_{i,j} | o_1, \dots, o_k) \quad (1)$$

For the calculation of such a probability it is convenient to use the so-called *log-odds* (refer to (Thrun, 2003) for further detail), which requires the computation, for each $c_{i,j}$ at time t , of the expression:

$$l^t(c_{i,j}) = \log \frac{p(c_{i,j} | o_1, \dots, o_k)}{1 - p(c_{i,j} | o_1, \dots, o_k)} \quad (2)$$

The memory cells are initialized with the value:

$$l^0(c_{i,j}) = \log \frac{p(c_{i,j})}{1 - p(c_{i,j})} \quad (3)$$

where $p(c_{i,j})$ has been set to 0.5.

Given l^t it is possible to retrieve the probability of each cell as:

$$p(c_{i,j} | o_1, \dots, o_k) = 1 - \frac{1}{e^{l^t(c_{i,j})}} \quad (4)$$

and from that, we create an obstacle map by considering that a cell $c_{i,j}$ is occupied if its probability is above a given threshold. To feed the reactive navigator, a scanner simulator converts this obstacle grid map into a scan format.

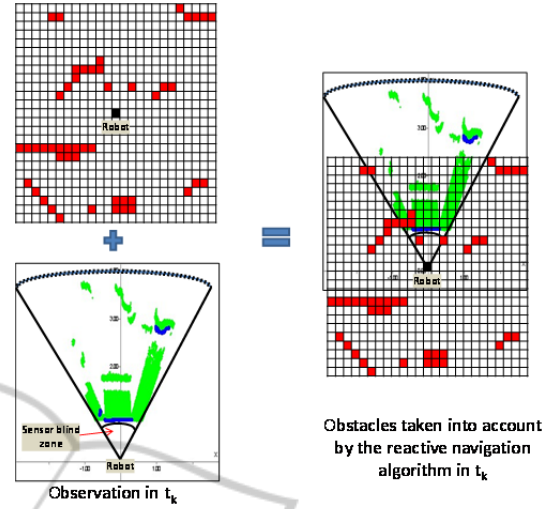


Figure 6: Short-term memory at time t_k . The memory stores a set of previous sensor measurements into a grid. Right, the obstacles considered by the reactive navigator are formed by the integration of points from the blind zone (in red) and the current virtual scan (in blue), which is obtained from the Kinect data (in green).

3.2.2 Memory Update

Let o_t be a virtual scan observation derived from Kinect at time t . Let c_k be the cell where the k -th measurement of the scan lies, given the current robot pose. Using the Bayes rule and *log-odds*, the updating of the value $l^t(c_{i,j})$ as a consequence of a new scan o_t is performed through the following expression (see (Thrun, 2003)):

$$\forall c_{ij} = c_k, \quad l^t(c_{i,j}) = l^{t-1}(c_{i,j}) + \log \left(\frac{p(c_{i,j} | o_t)}{1 - p(c_{i,j} | o_t)} \right) + \log \left(\frac{1 - p(c_{i,j})}{p(c_{i,j})} \right) \quad (5)$$

where the a posteriori probability $p(c_{i,j} | o_t)$ is calculated with the Bayes rule using the following sensor model:

$$p(o_t | M, c_{i,j} = 1) = \frac{1}{\sqrt{2\pi\sigma^2}} e^{-\frac{(o_t - d_{i,j})^2}{\sigma^2}} \quad (6)$$

where $d_{i,j}$ is the distance to the center of the cell $c_{i,j}$.

The term $\log \left(\frac{1 - p(c_{i,j})}{p(c_{i,j})} \right)$ is a constant which

depends on the selected value of the a priori probability $p(c_{i,j})$. Therefore, considering

$p(c_{i,j}) = 0.5$, the calculation of the memory update is simplified to:

$$\forall c_{ij} = c_k, l^t(c_{i,j}) = l^{t-1}(c_{i,j}) + \log \left(\frac{p(c_{i,j} | o_t)}{1 - p(c_{i,j} | o_t)} \right) \quad (7)$$

Notice that, according to this update mechanism a cell requires persistent observations to change from occupied to free, and viceversa. Also, note that non-observed cells are not updated, i.e., they keep their values.



Figure 7: Mobile robot SANCHO, equipped with 2 Hokuyo laser scanners and a Kinect sensor for obstacle avoidance.

4 IMPLEMENTATION AND DISCUSSION

The proposed approach has been implemented in the mobile robot SANCHO (Gonzalez et al, 2009) (see figure 7). The size of the short-term memory was set to 100 x 100 cells, for a 2 x 2m. area around the robot, i.e., with a cell size of 2 cm.

SANCHO, built upon a commercial Pioneer 3DX base, is equipped with two Hokuyo laser scanners (Hokuyo, www.hokuyo-aut.jp) placed at 30 cm. over the floor (scanning the front and the rear of the robot) and a Kinect sensor in its front upper part (see figure 7).

The reactive navigation system of SANCHO, called PTG-based navigator, transforms the 2D local obstacles in the 3D Configuration Space of the robot into the so-called "Trajectory Parameter Spaces" (TP-Spaces). A TP-Space is a 2D representation of all the poses the robot could reach if it moved according to a certain path model. Since several path models are considered by the reactive system, several TP-Spaces are built. The mathematical transformation between the C-Space and the TP-Spaces is done by "Parameterized Trajectory Generators" or PTGs, each one representing a path model (e.g. circular, turn&move-straight, etc.) that

fulfills certain geometrical and topological properties. As a result of this transformation the robot in the TP-space becomes a free-flying point whose motion might be solved by any holonomic obstacle avoidance, such as *Virtual Force Field* (Borenstein and Koren, 1989) or *Nearest Histogram* (Minguez and Montano, 2004). Please, refer to (Blanco et al., 2008) for a more detailed explanation of the PTG-based navigator. An interested feature of the PTG-based navigator is that it can deal with several sensors that provide surrounding information simultaneously.

When using only the two radial laser scanners, SANCHO is prone to crash with many unobserved objects that it may encounter in a typical environment, e.g. tables, chairs, boxes, plants, coat stands, shelves, etc. After incorporated the Kinect sensor this problem has been drastically reduced, though not completely eliminated. Since a precise quantification of the improvement level of the proposed approach is not possible we have tried to validate the method with two different tests. In the first, we have repeated a number of robot local navigations, i.e. go from A to B, with the two sensing configurations (with and without Kinect) and varying the obstacles along the path. Figure 8 shows one of these setups in our lab, with obstacles at different heights, including a papers box, the base of another robot, the board of a table, and a coat stand with jackets. Some of the trajectories followed by the robot are shown in figure 9. The red one corresponds to the navigation performed using only the radial laser scanners, which ends up with the robot bumping into the cardboard box. On the contrary, when using Kinect (the other three paths), SANCHO manages to negotiate all the obstacles, so reaching the goal successfully.

A second experiment has consisted of robot SANCHO moving randomly for more than 20 hours



Figure 8: Scenario where some of the experiments were conducted.

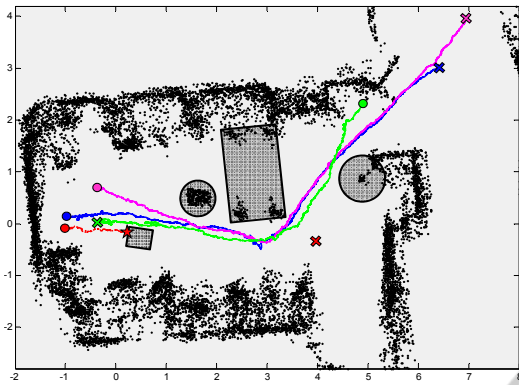


Figure 9: Paths followed by the robot during four different navigations. The colored circles represent the initial position of the robot, and the crosses correspond to the target locations. Black points are obstacles detected by the laser range finders. The rectangles and circles have been added manually, and represent the obstacles undetected by the laser scanners. Axis units are meters.

A second experiment has consisted of robot SANCHO moving randomly for more than 20 hours (in sessions of around 2 hours) in the environment represented in the map of Figure 10. The reactive navigation in this case was running as the lower part of a hybrid navigational system with a topological navigation on top (Fernández-Madriral et al., 2004). During all these sessions SANCHO suffered 5 collisions: three when passing doorways and 2 when making rapid turns.

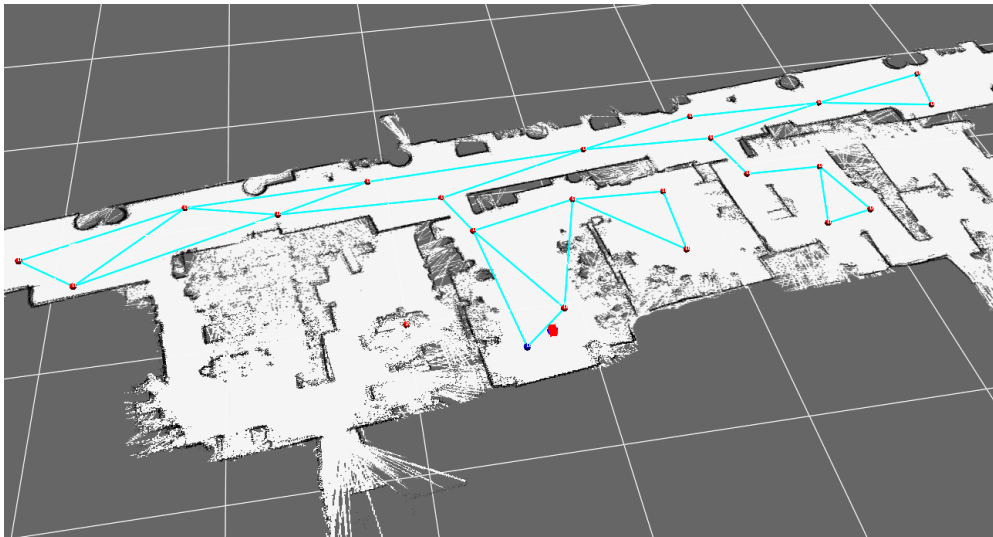


Figure 10: Topological and metric maps used in the second experiment mapping 6 rooms connected by a large corridor. Red nodes represent topological locations and blue lines the possible paths between them. Orders to the robot were to navigate randomly between nodes during periods of 2 hours. The metric map was used for localization purposes.

5 CONCLUSIONS

In this paper we have presented methods to conveniently adapt the 3D information provided by a Kinect device to work with a reactive navigator designed to cope with radial laser scanners. It has been proposed solutions for two of the major Kinect drawbacks: the huge amount of data provided by the sensor, more than 300.000 measures per frame at 30Hz, and its large blind zone due to both its narrow field-of-view and the lower limit of its operational range (from 0.5 to 1m., depending on the surface characteristics).

We have experimentally demonstrated the Kinect potential to detect small obstacles, a key aspect for safety during a reactive navigation. Finally, a number of tests have been conducted, validating the suitability of the proposed methods.

ACKNOWLEDGEMENTS

This work has been supported by two projects: “GiraffPlus”, funded by EU under contract FP7 - ICT - #288173, and “TAROTH: New developments toward a robot at home”, funded by the Spanish Government and the “European Regional Development Fund ERDF” under contract DPI2011-25483.

REFERENCES

- Biswas, J., Veloso, M., 2011. Depth Camera based Localization and Navigation for Indoor Mobile Robots. In *RGB-D Workshop at RSS 2011*.
- Blanco, J. L., Gonzalez, J., Fernandez-Madrigal, J.A., 2008. Extending Obstacle Avoidance Methods through Multiple Parameter-Space Transformations. In *Autonomous Robots*, vol. 24 (1).
- Borenstein, J., Koren, Y., 1989. Real-time Obstacle Avoidance for Fast Mobile Robots. In *IEEE Transactions on Systems, Man, and Cybernetics*, vol. 19, no. 5.
- Cunha, J., Pedrosa, E., Cruz, C., Neves, A., Lau, N., 2011. Using a Depth Camera for Indoor Robot Localization and Navigation. In *RGB-D Workshop at RSS 2011*.
- Fernández-Madrigal, J. A., Galindo, C., González, J., 2004. Assistive navigation of a robotic wheelchair using a multihierarchical model of the environment. In *Integrated Computer-Aided Engineering* vol.11, no. 4.
- Fiorini, P., Shiller, Z., 1988. Motion Planning in Dynamic Environments using Velocity Obstacles. In *The International Journal of Robotics Research*, vol. 17, no. 7.
- Freedman, B., Shpunt, A., Machline, M., Arieli, Y., 2010. Depth Mapping using Projected Patterns. *Patent No.:* US 2010/0118123 A1.
- Garcia, J., Zalevsky, Z., 2008. Range Mapping Using Speckle Decorrelation. *Patent No.:* US 7,433,024 B2.
- Gonzalez, J., Galindo, C., Blanco, J.L., Fernandez-Madrigal, J.A., Arevalo, V., Moreno, F.A., 2009. SANCHO, a Fair Host Robot. A Description. In *IEEE International Conference on Mechatronics (ICM)*, Malaga, Spain.
- Holz, D., Lörken, C., Surmann H., 2008. Continuous 3D Sensing for Navigation and SLAM in Cluttered and Dynamic Environments. In *International Conference on Information Fusion of the (FUSION)*. Cologne, Germany.
- Hokuyo: <http://www.hokuyo-aut.jp/>
- Kinect: <http://www.xbox.com/en-US/kinect>.
- Khoshelham, K., 2011. Accuracy analysis of kinect depth data. In *ISPRS Workshop Laser Scanning*, Calgary, Canada.
- Marder-Eppstein, E., Berger, E., Foote, T., Gerkey, B., Konolige, K., 2010. The Office Marathon: Robust navigation in an indoor office environment. In *IEEE International Conference on Robotics and Automation (ICRA)*.
- Minguez, J., Montano, L., 2004. Nearness Diagram (ND) Navigation: Collision Avoidance in Troublesome Scenarios. In *IEEE Transactions on Robotics and Automation*, vol.20, no.1.
- PrimeSense: <http://www.primesense.com>.
- Thrun, S., 2003. Learning occupancy Grid Maps with Forward Sensor models. *Autonomous Robots*, n. 15.