

Developing Open Source Dataloggers for Inquiry Learning

George Hloupis, Vassilis Bimpikas, Ilias Stavrakas, Konstantinos Moutzouris,
Charalampos Stergiopoulos and Dimos Triantis

New Technologies and Methodologies in Education Unit, Department of Electronics,
Technological Educational Institute of Athens, Agiou Spyridonos, Egaleo, Athens, Greece

Keywords: Dataloggers, Arduino, Open Source, Inquiry Learning, Project-based Learning, Hands-on Assignments.

Abstract: There exists a continuous need to promote better Science Technology Engineering and Mathematics (STEM) education at the younger students. To satisfy this need hands-on laboratory assignments and inquiry learning projects are widely accepted as appropriate approaches. One key issue for both approaches is the effective and adaptive data logging. This article describes the development of educational datalogger devices, using open source software and hardware which can be used to collect, present and save data for both offline and online analysis. The novelty of the proposed devices lies on the fact the presented implementations are not dedicated devices bind to specific features but they can be seen as educational datalogger platforms which are expandable and adaptive to students' needs in a minimum cost since they are based in open source solutions.

1 INTRODUCTION

The systematic displeasure with science, technology, engineering and mathematics (STEM) among young people (McCormarck, 2010) is a challenging problem that remains unsolved. Its solution is not necessary only because today students are potential tomorrow scientists but also because we demand from them to be critical reviewers of scientific knowledge : “*improving the public's ability to engage with such socio-scientific issues requires, therefore, not only a knowledge of the content of science but also a knowledge of 'how science works'*” (Osborne and Dillon, 2008). Recent studies (European Commission, Science education now, 2007) present a lack of interest among young people towards scientific topics which leads to declining number of university graduates in STEM areas. This is reflected as a shortage of scientists and engineers in the job market which comes in contrast with the prediction that there will be significant needs for medium and high-skilled jobs as pointed out by several studies [US Dept. of Commerce (2011) indicates 17% grow from 2008 to 2018, compared to 9.8% growth in non-STEM fields; European Table of Industrialists (2009) estimates 50 million new STEM jobs by year 2020)]. It is more than obvious that adequacy in STEM can serve as a major

keystone in developing adequate Research & Development capacity leading in this way to competitive innovators that will possibly lead the technology market far more competitive than in previous years.

A critical determinant on the above is an education approach that will be able to enable young people's corresponding key abilities (e.g. the ability to learn how to learn, developing mathematical, scientific and technological skills, being creative and active citizens). Students must be exposed to this type of education very early in order to spark their interest and ensure they received all the required supplies leading towards to a valued university degree in STEM areas. There is no doubt that teachers, schools and the education system at whole have the responsibility to cultivate a positive attitude to science to young people (Gras-Velázquez et. al., 2009). Their motivation is of major importance in order to decide studies in STEM areas. Schoolchildren's views of science are formed usually at primary school level and these views are highly committed to their attitudes to science and technology (Osborn and Dillon, 2008). As Gipps (2002) pointed out “*Scientific inquiry cannot be made independent of the context, observer or means of observation, and its successful prosecution will usually require creativity and intuition, qualities that*

do not appear on standard diagrams of ‘scientific method’”. Science oriented project provides the students the outline of the thinking and planning skills required by professional scientists (Hodson, 1998). Under this approach students can get some idea of the people who sometimes guess, often try things without knowing what the exact result will be and it is not rare that many experiments “fail”. Shapiro (1996) asserts that the lack of investigation results that the majority of students completed their secondary programs having missed involvement in developing an understanding of the very nature of science itself.

Data logging lends itself particularly well to scientific inquiry and may be the best educational use that can be benefited of this technology (Gipps, 2001). Data logging methods allow pupils to assume more responsibility and control in their science practical investigations. The instant display of measurements allows students to set new hypotheses and change conditions to carry out further experiments. Graph generation soon enough after making a prediction greatly facilitates the pedagogical technique of ‘*Predict-Observe-Explain*’ (Osborne and Hennessy, 2003) with rapid feedback and the possibility of sorting out of the reasons for unsuccessful predictions. Students were able to ‘feel’ for how the action and sensing reaction are related and can therefore have a better understanding of the meaning of the graph. Instant data logging and analysis are strong motivating factors for students to collect multiple data through repeated measurements. Thus, this combined (logging and analysis) process enables students to experience the entire inquiry process as holistic and cyclical (Rogers and Wild, 1994) a scenario that is rare in a conventional science practical lessons.

The purpose of the current paper is to demonstrate the design and implementation of three low cost educational dataloggers based on Arduino open source prototyping platform suitable for carrying out the scientific inquiry learning outcomes. The obvious purpose of our efforts is the minimization of the cost (comparing to corresponding solutions) along with the provided flexibility (e.g. open source firmwares for different measurement scenarios, unrestricted changes through Arduino or Visual programming environment) as well as with easiness to use (e.g. plug & play sensors, wizard type questions, touch screen for user input, ready to run experiments).

2 DESIGN CONSIDERATIONS FOR AN EDUCATIONAL DATALOGGER

A modern educational datalogger must be capable of providing some advantages over its predecessors. Some of them can be the deconstruction of traditional boundaries between distinct learning environments, the strong search capabilities, the interaction ability as well as the effective learning and familiarization with state-of-the-art technologies. These advantages lead to some basic design requirements as below (Hloupis et. al, 2012):

- Ease of use: Students without computer experience must be able to use it (e.g. use of phone-like touch screens).
- Adaptability: student’s needs and skill must define system’s boundaries (e.g. no need for excessive training in order to use the datalogger)
- Suitability: Subjects must be provided with various ways of gathering the learning outcome (e.g. a solar energy experiment must be carried out by means of different sensors)
- Availability: operations and functions must be available using simple procedures (e.g. adding a new set of sensors must be a common procedure independent from sensors’ type)
- Usefulness: actions and dissemination must be in familiar forms (e.g. data transfer by means of SD cards of USB drives, data processing with ready-to-run software)
- Open source and low cost (e.g. users must be able to select the desirable features and characteristics from a range of cost effective options)

The above design requirements can be weighted proportionally leading to implementation solutions that will be different in their final form. In the current study the prototypes of three representative solutions are demonstrated where briefly described at Table 1.

The selection of Arduino platform as the core of the proposed educational dataloggers dictated from two additional factors (except the fulfilment of design requirements that stated earlier): its open source characteristics and the huge amount of support that can be found in Internet today. For readers that are not familiar with Arduino platform excellent introductory material can be found in official site (www.arduino.cc) as well as in several textbooks (Banzi, 2011; McRoberts, 2010; Oxer and Blemmigs, 2009; Noble , 2012).

Table 1: Features of proposed educational dataloggers.

Short name	Common Features	Main (additional) Features	Firmware / hardware provided	Final Cost
Medimnos	<ul style="list-style-type: none"> • Plug & Play, colour coded external sensors • Real time clock (RTC) • Data capturing interval selected by the user. • Data storage on an SD card for offline analysis. • Battery operated. 	<ul style="list-style-type: none"> ✓ LCD character screen ✓ Push button control ✓ 8 Analog inputs 	YES (Arduino codes & Schematics)	~20€
Kyathos		<ul style="list-style-type: none"> ✓ 1.8" 18-bit Color TFT ✓ Joystick control ✓ 16 Analog inputs ✓ Data sent over the USB for online analysis. 	YES (Arduino codes & Schematics)	~40€
Kotyli		<ul style="list-style-type: none"> ✓ Touch screen with custom designed interfaces (software provided) ✓ Predefined experiment templates ✓ 16 Analog inputs ✓ Data sent over the USB for online analysis. 	YES (Arduino codes, Interface Graphics & Schematics)	<100€

3 EDUCATIONAL DATALOGGER PROTOTYPES

3.1 Common Features

Since the prototype dataloggers share some common features, these will be explained in detail initially.

- Plug & Play external sensors. Ease of use can be highly benefited if we release users from obligatory sensor selection. Keeping in mind that the proposed dataloggers can be used even in primary schools curricula we propose a colour code scheme for sensor signalling. Under this approach the students only have to match the colour of sensor outlet to corresponding coloured input of the datalogger. A quick visual check by the teacher can ensure the validity of the connection increasing at the same time students' confidence.
- Analog inputs. The low cost Arduino versions that based on AVR MEGA 328 microcontroller can provide 6 (Uno, Leonardo, Diecimilla, Pro, Lilypad) or 8 (ProMini, Nano, Fio) analog inputs. From them only 4 remain free for user input. To overcome this limitation we use only one analog input coupled with an 8x1 or 16x1 multiplexer and leave the remaining three reserved for future purposes.
- Real time clock. All measurements are time tagged by means of onboard RTC in YYYY/MM/DD HH:MM:SS format. The RTC is connected to its

own battery so that the date and time information are not lost when main power is removed from the datalogger. Time data appended to analog inputs values providing a unique text string for each measurement

- Data capturing interval selected by the user. It is not expected that the students (especially the younger ones) will be familiar with terms like "refresh rate", "frequency", "period", "time interval" e.t.c. To overcome this shortage before every new measurement cycle we prompt a message to the user asking "how many times per hour" and waiting for the user input (using Up/Down keys). Under this approach teachers can easily explain more practically how the measurement sequence evolves (i.e. the number 6 means that the datalogger is going to measure every 10min). The hour basis was selected as a compromise between rapid measurements (e.g. sound, luminosity) and slower ones (e.g. temperature, humidity). Since the system is open source, in the provided software code, the teacher can easily change the capturing interval (i.e. by setting it in a per minute basis) as well as the prompt message.
- Data storage. The use of SD card except its obvious function of saving data offers two alternative impacts on hands-on approach: On one hand it provides an excellent springboard to the teacher in order to demonstrate (i.e. through educational gaming: "Spies and Secret Agents" where the precious SD cards hold the important

data) to students the difference between the instrument (e.g. the “system that measures”) and the results (e.g. the “data”). On the other hand the datalogger is capable for field measurement installations where the students can exchange the SD cards in predefined times (e.g. Weekly outdoor temperature measurements with SD card switching every morning in order to examine previous day’s measurements).

- Battery operated. The datalogger is powered from a 9V rechargeable battery. This is not mandatory since the datalogger designed in such a way that can accept power with minimum at 7V and maximum at 15V in any kind of popular formats (NiCd, NiMH e.t.c). There is also provision for the use of photovoltaic cells as power module providing in this way easy, long term, installations for field measurements.

3.2 Medimnos Prototype

This is the prototype that implemented using cost minimization as major design consideration .The modular view of this datalogger is shown on Fig.1. The main components of this prototype is a “barebone” Arduino board, a SD Card module, a RTC module, a voltage regulator, a 8X1 input multiplexer and monochrome LCD screen (Fig.2)

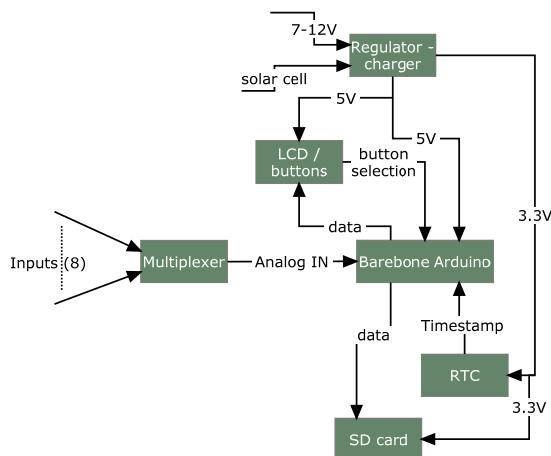


Figure 1: Modular view of Medimnos datalogger.

The sequence of actions for the student is straightforward (italics in parentheses are explanations of user actions) as below:

- Startup (*Toggle On/Off switch – Welcome message appears*)
- Measurement quantity selection (*using Up/Down buttons*).
- Define measurement repetition (*response to*

question “how many times per hour” by means using Up/Down buttons)

- Selection of concurrent measurement (*response to question “Add measurement ?” by means using Up/Down buttons*). “Yes” means return to Step ii) while “No” means go to next Step

- Start Measurement (*user prompted with a message “Ready? Press Start” in order to start measurement sequence*)

Termination of measurements is achieved by pressing “Stop” button.

Data recorded in SD card as text files. Their names are in format `dataYYYYMMDDHHMMSS.txt`, where the values derived from the timestamp of 1st measurement. Every new measurement creates a new file. Inside the text file data are appended in tabular format with one header row, as below:

Date	Time	Temp	Humidity	Sound
2013/12/14	18:39:45	23.5	45	40
2013/12/14	18:41:45	23.4	45	52
2013/12/14	18:43:45	23.4	46	61

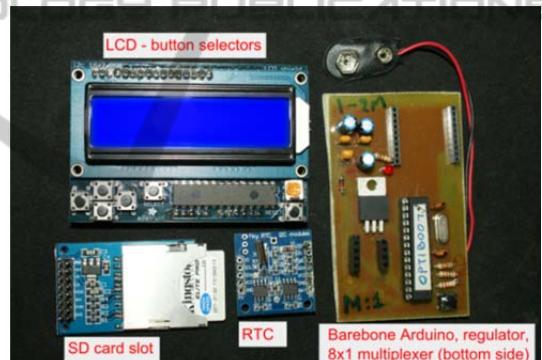


Figure 2: The main components of Medimnos prototype.

The tabulated format allows rapid import to all post-processing software (e.g. MS-Excel, OpenOffice e.t.c).

As long as the datalogger measures, the values of all the measuring quantities (i.e per analog input) displayed on LCD screen. The refresh rate of display is the same with measurement’s rate if this is not smaller than 30secs. If this is not happens (i.e. in frequent measurements) then the displayed value is the average value for the last 30secs of the measurement. This is done fully automatically and after the 30secs interval the current (or the averaged) value of the next measurement quantity is displayed. Under this approach every value is displayed for 30secs and if all the 16 analog inputs will be used 8mins required. Anytime the user can push the Left/Right buttons in order to see the value of Previous/Next measuring quantity without waiting

30secs for automatic switching.

3.3 Kyathos Prototype

This prototype uses an Arduino UNO board, a SD Card module, a RTC module, a voltage regulator, a 16X1 input multiplexer and a 1.8" color TFT screen with resolution 160x120 pixels with joystick selector. The Kyathos prototype can provide the values of all the measuring channels at the same time in TFT screen and these values can be colour marked (i.e. if a specific threshold is exceeded the presented value can be presented with red color) as presented in Fig.3.

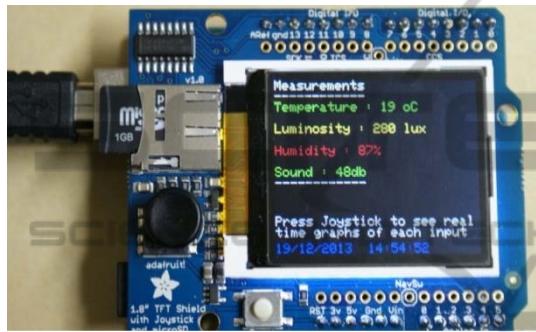


Figure 3: Acquired values' textual presentation screen for Kyathos prototype. Values are color coded (Red: over upper limit; Yellow: below lower limit; Green: beyond limits) and time stamped (blue message at bottom).

In addition, student is able to see additional screen plots with real time graph (Fig.4) of each the measurement quantity gathering in this way a preliminary but rapid view of quantity's behaviour. Effective visualization therefore reveals the meaning of data at several levels of detail, initially from a broad overview to the fine structure after data processing. This approach was selected since psychologists and education researchers very early proved the vital role of visual imagery in the processing of information (Bishop, 1989; Del Grande, 1990; Dreyfus, 1991; Presmeg, 1986; 1992) while problem-solving models (Goldin, 1987; Lowrie and Hill, 1996; Pirie and Kieren, 1991; 1992) have emphasized the role that imagery plays in the processing of information.

Simultaneously with screen presentation data sent to USB port providing in this way a route to real time data visualization in PC. At this point the students were able to see real time display of their measurements.

A free for educational use software packages like Stampplot (www.stampplot.com) can recognize the data stream from USB port and present it in familiar

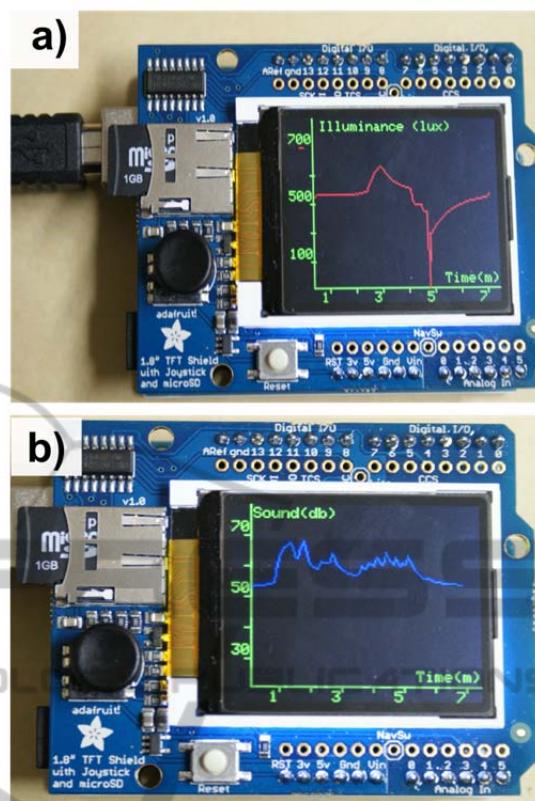


Figure 4: Real time graphs of measuring quantities from Kyathos prototype. Each graph hosts the values from one input (the measuring quantity signed on top left) while the student can subsequently transferred between graphs using joystick's left/right selections.

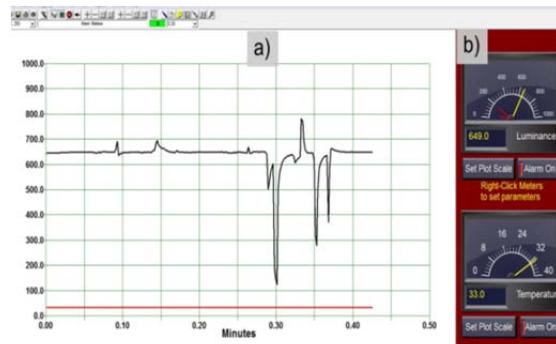


Figure 5: Real time presentation of acquired values that sent over USB in real time using Stampplot software: a) Data from channel 1 and b) data from channel 1 (top gauge) and channel 2 (bottom gauge).

ways to the students (i.e. like gauges or indicators) as presented in Fig.5.

Obviously the teachers are free to select any other alternative freeware solution (i.e LiveGraph, qSerialTerm, JGraph, Kst) since the data stream that is sent over USB is fully configurable in the

provided Arduino codes. The remaining characteristics (SD card storage, sequence of measurement actions) remain the same as Medimnos except the use of joystick as selector instead of push buttons.

3.4 Kotyli Prototype

Mobile, handheld technology has become the leading trend of daily routine and the integration of touchscreen technology into mobile handheld devices is quickly becoming equally common. Based on this fact it is not unlikely to consider that students has become more familiar with touch screens rather than develop corresponding computer skills (i.e. keyboard input, mouse handling e.t.c.) for data input. Increasing usability and easiness led to the current prototype solution that is based on Medimnos prototype except that color TFT screen replaced with a 3.2" resistive touch screen. Resistive touch screens are pressure sensitive, so they can be operated with any input device, including a gloved hand or stylus. A solution like the above provide the flexibility to design custom graphics and user input interfaces thus increasing the adaptability of the datalogger to various hands-on projects (e.g. results of temperature measurements can be presented in a thermometer gauge). All the graphics can be designed in accompanying comprehensive software IDE for Microsoft Windows that provides an integrated software development platform for all. Buttons, labels, dials, gauges, input and backgrounds can be easily created using drag-n-drop actions. Upon completion the user uploads the graphics and the relevant Arduino code is generated automatically.

An additional feature that added to Kotyli prototype is the use of predefined experiment templates. A set of common experiments (i.e. temperature measuring with one or two sensors, pH measurements, voltage measurements of common type batteries, solar activity during one day e.t.c.). To enhance the use of this feature a visual open source language for programming, Minibloq (<http://blog.minibloq.org/>) was selected in order to release teachers from configuring the Arduino using textual programming. Once installed, the program uses the usual drag-and-drop blocks editor style of working. The novel features are that there is simulation of the hardware and the code corresponding to the visual program can be seen in another window. Creation of new blocks is possible and this is the feature that used for uploading predefined experiments. Minibloq can be used also

for any other procedure (i.e. uploading new datalogger firmware or design new experiment) as described in Medimnos and Kyathos prototypes. A representative screenshot form is presented in Fig.6.



Figure 6: Definition of new experiments using Minibloq visual programming language. The teacher selects predefined experiment blocks (from toolbar at bottom right) and drags them to the central panel. Possible configurations can be made by clicking graphical objects. Concurrently the corresponding Arduino code is presented at right panel while at the left panel a hardware view of Arduino connections is depicted.



Figure 7: Sequence of basic actions for Kotyli datalogger as presented in resistive touch screen: a) Selection of new or existing template for measurements, b) Selection list of available channels (in case of "New" measurement), c) Definition of measurement repetition (slider control), d) Prompting for sensor attachment and start measurement, e) Results in form of indicator f) Results in form of dial gauge.

The measurement sequence is slightly altered in relation with previous two dataloggers. Initially the

Table 2: Examples of inquiry based activities by means of proposed dataloggers.

<i>Activities' aspect</i>	<i>Level</i>	<i>Used sensors</i>
Sound proofing, Sound sources	Primary	Microphone
Light passing, reflection materials		Photoresistor
Sun as a source of heat & light		Photoresistor, Temperature
Insulation , Heat Energy		In / Out Temperature
Distance & Proximity measures		Sonar
Motion classification		Accelerometer
Energy Harvesting		Voltage/current
Water quality		pH
Endothermic reactions		Temperature
Testing Sunglasses	Secondary	UV photodetector
Crushing & Centripetal force, Tensile strength		Force
Environment & pollution		Gases - Dust
Weather prediction		Barometric – anemometer - humidity
Renewable resources (sun, water , wind)		Flow - Voltage - Solar - anemometer

student is asked if he wants a new or a predefined experiment. In case of predefined experiment button is pressed a list is loaded and the student just selects one from the list. In case of new experiment selection, a new screen asks the student to select the desired measuring quantity. The student selects by pressing the corresponding button and the next screen used for the definition of measurement repetition (question “*how many times per hour*”). After this, a message “*Add measurement?*” is appeared, providing the student the opportunity to append another quantity in measurement sequence. Next a screen appeared with a prompt message (in which port the sensor must be inserted) and a “Measure” button. Finally the results of the measurements presented as dials or gauges in real time. The whole sequence in screenshots is presented in Fig.7.

4 DIDACTIC UNIT EXAMPLES

The proposed experimental prototypes can be easily imported to STEM oriented class courses. Following an inquiry based approach students can experiment using their educational dataloggers as proposed in Table 2.

5 CONCLUSIONS

The design of an Arduino based portable datalogger devices has been described. The choice of Arduino as the core platform dictated from its suitability for starter projects, its cost and durability, a thriving community offering support and ideas and a

maturity that is rare in open source solutions. Along with the programming easiness it seems that Arduino platform will prevail very shortly as the low cost solution even for educational projects. The three presented prototypes share some common features (Plug & Play colour coded external sensors Real time clock, Data capturing interval selected by the use, Data storage on an SD card for offline analysis, Battery operated) but each one has its own additional and unique features: *Medimnos* prototype implemented as low cost solution, *Kyathos* focus on real time presentations of results by sending data over USB and presented them at the same time in a color TFT screen (as independent values or as real time graphs) while *Kotyli* designed using the increasing usability and easiness as major determinants (using resistive touch screen and animated graphics for data presentation). Regarding *Kotyli*, the obvious comparison with Smartphones or Tablets, highlights its two main advantages against them: the fully configurable user interface (through open source solutions) and the sensors’ plug-n-play capability (without using the USB port).

The intention of the authors is that the proposed implementations will act as starting points for adaptive designs to several curricula since the open source character of the designs ensures that this is an ongoing research. Along with the availability of Arduino codes it not overweening to claim that this open source platform will be accompanying the educational system for the next years.

REFERENCES

- Banzi, M., 2011. *Getting Started with Arduino*, O'Reilly - Maker Media, Inc; Second Edition.

- Bishop, A.J., 1989. *Review of research on visualization in mathematics education*, Focus on Learning Problems in Mathematics, 11 (1), 7-11.
- Del Grande, J., 1990. *Spatial sense*. Arithmetic Teacher, 37 (6), 14-20.
- Dreyfus, T., 1991. *On the status of visual reasoning in mathematics and mathematics education*, 15th Psychology of Mathematics Education Conference. Assisi, Italy.
- European Commission, 2007, *Science Education Now, A Renewed Pedagogy for the Future of Europe*. Available at: http://ec.europa.eu/research/science-society/document_library/pdf_06/report-rocard-onscience-education_en.pdf (last accessed January 2014)
- Gras-Veldzquez, J., Joyce, A. and Debry, M., 2009. *White paper: Women and ICT – Why are girls still not attracted to ICT studies and careers?*, Available at: http://blog.eun.org/insightblog/upload/Women_and_IT_FINAL.pdf, [last accessed January 2014]
- European Table of Industrialists, 2009. *The Mathematics, Science and Technology Education report, the case for a European Coordination Body*. Available at: <http://www.ert.be/DOC/09113.pdf> (last accessed January 2014)
- Goldin, G. A., 1987, (a) *Levels of language in mathematical problem solving*; (b) *Cognitive representational systems for mathematical problem solving*. In C. Janvier (Ed.), *Problems of representation in the teaching and learning of mathematics* (pp. 59-65 & 125-145). Hillsdale, NJ: Lawrence Erlbaum Associates.
- Gipps, J., 2001. *Data Logging and Inquiry Learning in Science*, Australian Computer Society, 7th World Conference on Computers in Education, Copenhagen, July 29-August 3.
- Hloupis, G., Stavrakas, I., Moutzouris, K., Alexandridis, A.; Triantis, D., 2012. *WSN Open Source Development Platform: Application to Green Learning*, Procedia Engineering 25, pp. 1049-1052.
- Hodson, D., 1998. *Teaching and Learning Science: Towards a personalized approach*, Buckingham Open University Press.
- Lowrie, T., & Hill, D., 1996. *The development of a dynamic problem-solving model*, Journal of Science and Mathematics Education in Southeast Asia, XIX (1), 1-11.
- McCormarck, A., 2010. *The e-Skills Manifesto, A call to arms*. Available at: http://files.eun.org/eskillsweek/manifesto/e-skills_manifesto.pdf (last accessed January 2014)
- McRoberts, M., 2010. *Beginning Arduino*, Technology in Action series, Apress.
- Noble, J., 2012. *Programming Interactivity*, O'Reilly Media; Second Edition.
- Osborne, J. and Dillon, J., 2008. *Science education in Europe: critical reflections*. Available at: http://www.pollen-europa.net/pollen_dev/Images_Editor/Nuffield%20report.pdf (last accessed January 2014)
- Osborne, J., & Hennessy, S., 2003. *Literature Review in Science Education and the Role of ICT: Promise, Problems and Future Directions*, NESTA FutureLab series, (Report 6), 1-41.
- Oxer, J. and Bleommigs, H., 2009. *Practical Arduino*, Technology in Action series, Apress.
- Pirie, S., & Kieren, T., 1991. *Folding back: Dynamics in the growth of mathematical understanding*. In F. Fulvinghetti (Ed.), *Proceedings of the 15th PME Conference* (Vol. 3, pp. 169-176). Italy: Program Committee for the International Group for the Psychology of Mathematics Education.
- Pirie, S., & Kieren, T., 1992. *Watching Sandy's understanding grow*, Journal of Mathematical Behaviour, 11, 243-257.
- Presmeg, N. C., 1986. *Visualization in high school mathematics*, Learning of Mathematics, 6 (3), 42-46.
- Presmeg, N., 1992. *Prototypes, metaphors, metonymies and imaginative rationality in high school mathematics*, Educational Studies in Mathematics, 23 (6), 595-610.
- Rogers, L., & Wild, P., 1994. *The use of IT in practical science - a practical study in three schools*, School Science Review, 75(273), 21-28.
- US Department of Commerce, Economics & Statistics Administration, 2011. *STEM: Good Jobs Now and for the Future*.